



The MX series of Gefran, are pressure transmitters for using in High temperature environment. The main characteristic of this series is the capability to read temperature of the media up to 400°C. The constructive principle is based on the hydraulic transmission of the pressure. The fluid-filled system assures the temperature stability. The physical measure is transformed in a electrical measure by means the strain-gauge technology.

MAIN FEATURES

- Pressure ranges: 0-35 to 0-2000bar / 0-500 to 0-30000psi
- Extensimetric measurement principle with Wheatstone bridge
- Precision: $\leq \pm 0.25\%$ FSO (H); $\leq \pm 0.5\%$ FSO (M)
- Calibration signal 80% FSO internally generated
- Completely interchangeable with all existing products
- Protection level: IP65 (6-pin connector)
- Standard threading 1/2-20UNF, M18x1.5, other versions on request
- Stainless steel diaphragm 15-5 PH with GTP coating
- For ranges below 100 bar-1500 psi: 17-7 PH corrugated stainless steel diaphragm with GTP coating
- Other diaphragm types available on request

- MX0** The rigid rod configuration provides fast and easy installation.
- MX1** The flexible rod configuration is suitable for applications demanding greater thermal isolation and where installation would otherwise be difficult.
- MX2** This configuration lets you measure process pressure and temperature at the same point with a single installation.
- MX3** The configuration with exposed tip is ideal for applications in limited space.

Main intrinsic safety characteristics

Transmitter designed and produced in compliance with Directive 94/9/CE ATEX and according to European standards: for the second group (II-surfaces), category 1, explosive atmosphere with presence of gases, fumes or mists (G) protection mode Ex ia IIC T5, T4 room temperature -20°C/+55°C/+60°C/+70°C

Maximum voltage	30 V
Maximum current	100 mA
Maximum power	0,75 W
Equivalent inductance (*)	0,23 mH
Equivalent capacity (*)	26 nF

(*) includes inductance levels and capacity of a cable: (typical L 1microH/m and typical C 100pF/m) with maximum length 15m.

TECHNICAL SPECIFICATIONS

Rated precision, including effects of Linearity, Repeatability and Hysteresis	H $\leq \pm 0.25\%$ FSO (100...2000 bar) M $\leq \pm 0.5\%$ FSO (35...2000 bar)
Resolution	Infinite
Pressure ranges	0..35 to 0..2000bar 0..500 to 0..30000psi
Maximum applicable pressure	2 x FS 1,5 x FS beyond 1000bar/15000psi
Principle of measurement	Strain gauge
Power supply	12...30Vdc
Maximum input	30mA
Isolation resistance (at 50 Vdc)	>1000 MOhm
Signal at rated pressure (FSO)	20mA
Zero balancing	4mA
Calibration:	Rated pressure Room pressure
Maximum load	5% FSO min. 10bar (150psi)
Response time (10 at 90% FSO)	see diagram (page 3)
Output noise (RMS 10-400Hz)	~ 4ms
Calibration signal	< 0.05% FSO
Protection against overvoltages and power supply polarity reverse	80% FSO
Temperature range of Strain Gauge Housing	YES
Thermal drift in compensated range: Zero/Calibrat/Sensitivity	-20...+70°C -4...+158°F
Maximum temperature of diaphragm	< 0.02% FSO/°C < 0.01% FSO/°F
Influence due to fluid temperature change (zero)	400°C / 750°F
Standard material in contact with process medium	0.02 bar/°C 15 psi/100°F
Diaphragm:	Diaphragm: • 15-5 PH with GTP coating • 17-7 PH corrugated diaphragm with GTP coating for ranges <100 bar (1500psi)
Stem:	Stem: • 17-4 PH
Thermocouple (model MX2)	STD: type "J" (isolated junction)
Protection level (with 6-pin female connector installed)	IP65
Electrical connections	6-pin conn. VPT07RA10-6PT (PT02A-10-6P) 8-pin conn. PC02E-12-8P

FSO = Full Scale Output (Signal at rated pressure)


Power at zener barrier or active barrier. For version MX2, the thermocouple must be connected to EX-i circuits with devices assigned to galvanic separation and with protection mode [EX ia] IIC.



EC-Type Examination Certificate number:
CESI 02 ATEX 107


MECHANICAL DIMENSIONS

MX0

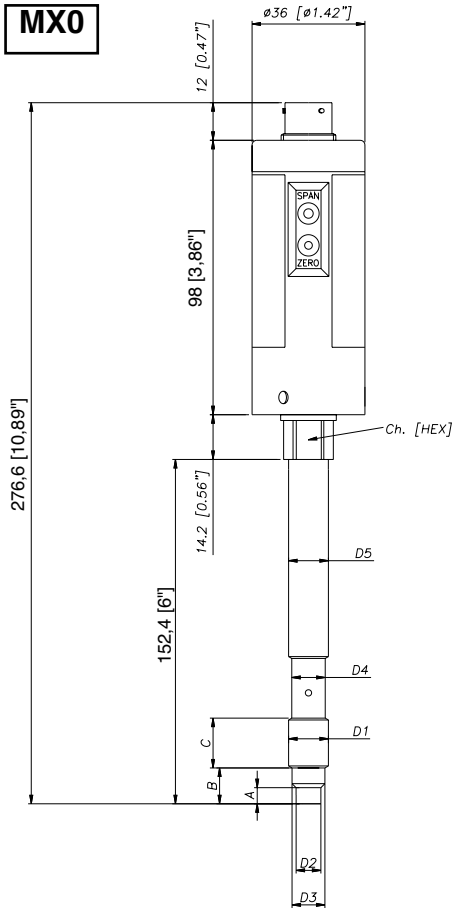


D1	1/2 - 20UNF
D2	$\phi 7.8 - 0.05$ [$\phi 0.31$ - 0.002]
D3	$\phi 10.5 - 0.025$ [$\phi 0.41$ - 0.001]
D4	$\phi 10.67$ [$\phi 0.42$]
D5	$\phi 12.7$ [$\phi 0.5$]
A	$5.56 - 0.26$ [0.22 - 0.01]
B	11.2 [0.44]
C	15.74 [0.62]
Ch	16 [$5/8$]

MX2

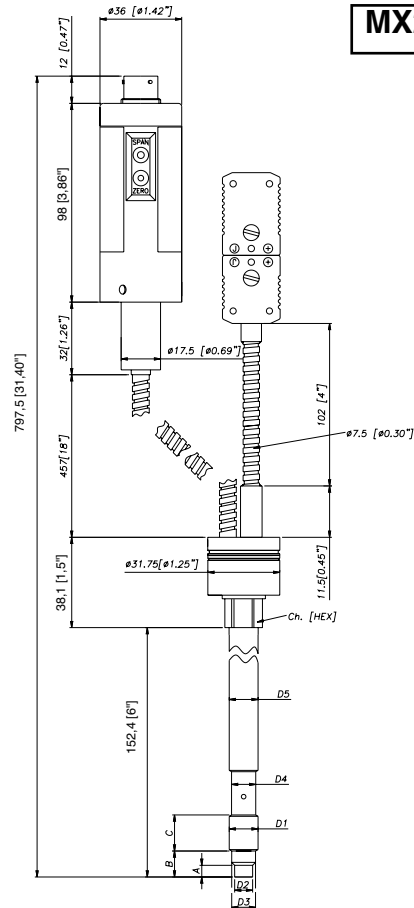


MX1

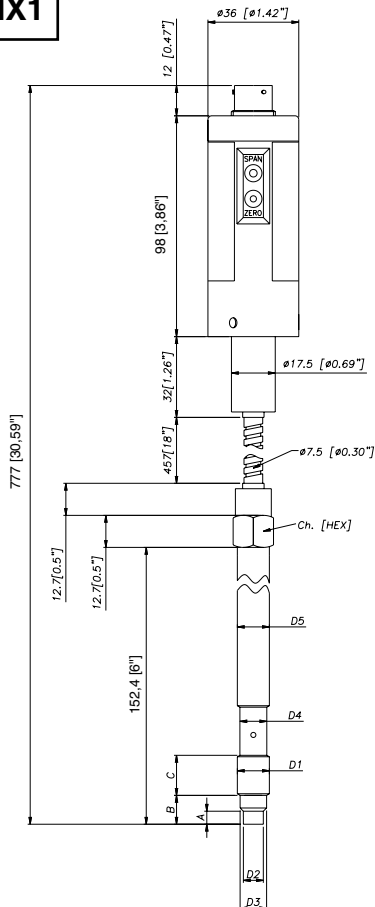

D1	M18x1.5
D2	$\phi 10 - 0.05$ [$\phi 0.394$ - 0.002]
D3	$\phi 16 - 0.08$ [$\phi 0.63$ - 0.003]
D4	$\phi 16 - 0.4$ [$\phi 0.63$ - 0.016]
D5	$\phi 18$ [$\phi 0.71$]
A	$6 - 0.26$ [0.24 - 0.01]
B	$14.8 - 0.4$ [0.58 - 0.016]
C	19 [0.75]
Ch	19 [$3/4$]

MX3

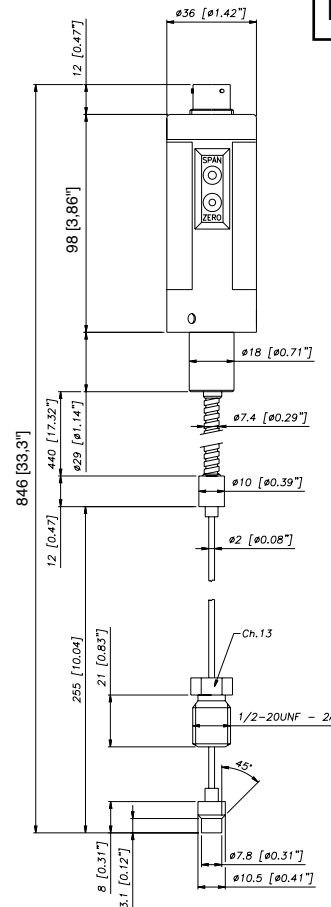


NOTE : dimensions refer to rigid stem length option "4" (153 mm – 6")


WARNING : For installation use a maximum tightening torque of 56 Nm(500 in-lb)

ELECTRICAL CHARACTERISTICS AND TEMPERATURE CLASSES


MODEL	(*) LEVEL L2	(*) LEVEL L1	TEMPERATURE CLASSES	ROOM TEMPERATURE
MX0	> 165mm	> 125mm	T4	-20...+60°C
MX1	> 665mm	> 625mm	T5 T4	-20...+55°C -20...+70°C
MX2	> 665mm	> 625mm	T5 T4	-20...+55°C -20...+70°C
MX3	> 665mm	> 625mm	T5 T4	-20...+55°C -20...+70°C

(*) with the level (L) in fig. 1, the table sets the minimum distance that the electrical circuit has to maintain from the block at high temperature.

 thermal isolating material with adequate thickness for the process temperature

 pressure transmitter housing block

 fluid at temperature (400°C)


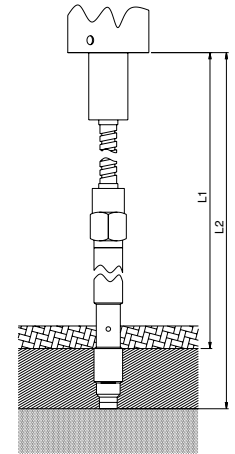


ELECTRICAL CONNECTIONS


Output in current (4...20mA 2 wires)

	6-pin	8-pin
Power supply (12...30Vdc) +	A	B
n.c.	C	A
Signal (4...20mA) -	B	D
n.c.	D	C
Calibration shunt	E - F	E - F
n.c.		G - H

The cable sheathing is connected to the transducer body

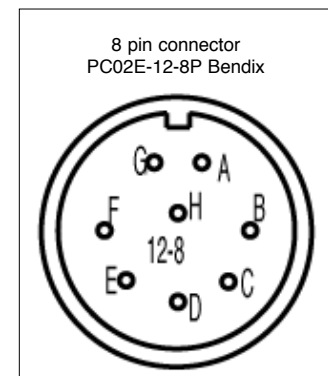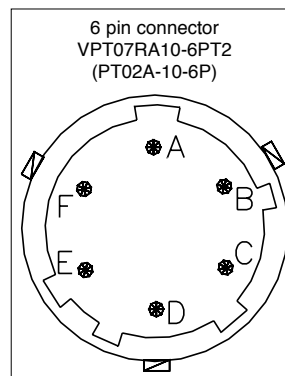


LOAD DIAGRAM (current output)

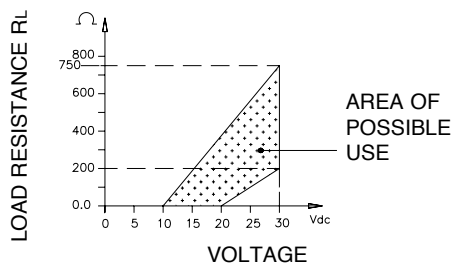

The diagram shows the best ratio of load to power supply for transmitters with 4...20mA output. For correct function, use a combination of load resistance and voltage that stays in the shaded zone.

SETTINGS

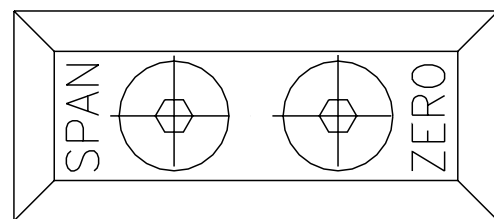

The signal setting to room pressure (ZERO) and the setting to rated pressure (SPAN) can be made with the appropriate trimmers, accessed inside the transmitter after removing the two fastening screws.

The SPAN setting is made during production and must not be changed.

Accessories

Fastening bracket
 Protection plug for 1/2-20 UNF
 Protection plug for M18x1.5
 Drill kit for 1/2 -20 UNF
 Drill kit for M18 x 1.5
 Cleaning kit for 1/2-20 UNF
 Cleaning kit for M18x1.5

SF18
 SC12
 SC18
 KF12
 KF18
 CT12
 CT18

Extension cables

6-pin connector with 3mt Atex cable
 6-pin connector with 4mt Atex cable
 6-pin connector with 5mt Atex cable
 6-pin connector with 10mt Atex cable

PCAV221
 PCAV104
 PCAV105
 PCAV106

Thermocouples for model MX2
 Type "J" (for rigid rod 153mm - 6")

TTER 718

